
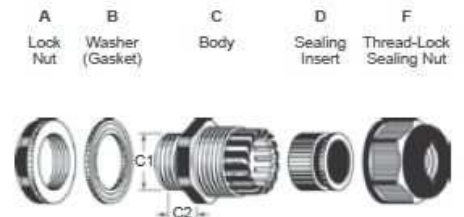


UV Black Nylon Cable Glands (Short Metric Thread)

Nylon Metric

Deeflex



UV resistant

■ Applications

Used for fixing cables and provide the effective protection against dust, water, oil and acid in the fields of electrical and electronic technologies, machines, telecommunications, wireless networking ODU's, power supplies, switches, junction boxes, solar PV modules, Inverters, lightings, displays, traffics, signals, surveillance cameras, measurements, sensors, plant engineering, installation and other instruments. Innovative design for the Seal and Clamp, wide clamping range, strong resistance against the tensile strength and thus it can protect cables effectively.

■ Characteristics

- Material: UL-certified Halogen-free PA66, flammability 94V-2 for A,C,F parts (UL file: E223722).
- Thread System: According to European standard EN60423.
- Seal & Washer: Oil resistant NBR, weather resistant EPDM or Natural Rubber for B,D parts.
- Standard Color: Black RAL9005
- IP Protection : Up to IP68 (used together with Washer within its cable range).
- Operation Temp.: Static:-40C to 100C, short-term: 120C. Dynamic:-20C to 80C, short-term:100C.
- Installation: Cables can be directly inserted into the hole of the same size thread and then fix it with the Locknut.

■ Specifications

* Carbon black is added for greater resistance to ultraviolet in outer door use.

P/N, Thread	Cable Range		AG (C1) (mm)	Panel Mounting Hole (mm)	GL(C2) (mm)	H (mm)	Spanner (mm)
	Min. (mm)	Max. (mm)					
PCNM12B	2	5	12	12.2	8	22	16
PCNM16B	5	10	16	16.2	8	27	22
PCNM20B	7	12	20	20.2	10	30	27
PCNM25B	9	16	25	25.2	10	35	33
PCNM32B	18	25	32	32.2	12	40	41/42
PCNM40B	22	32	40	40.2	14	48	52/53
PCNM50B	32	38	50	50.2	14	49	60/61
PCNM63B	37	44	63	63.2	14	50	67