




Corrugated PVC Covered Flexible Steel Conduit



Material:	(Lining) galvanized steel strip special insulation treated (Out layer) new PVC (Ultraviolet resistant, anti-aging)
Color:	Black & Grey
Working temperature:	-10°C-- +80°C, 100°C in short time.
Characteristics	<ol style="list-style-type: none"> 1. It has excellent performance of waterproof, insulation and tensile property. 2. Out layer material is PVC and add fireproof and flame retardant 3. The counter-lock structure provide a powerful tensile resistance, hard to break and deform 4. Good bending performance, smoothly inner structure let the wire and cable through easily.

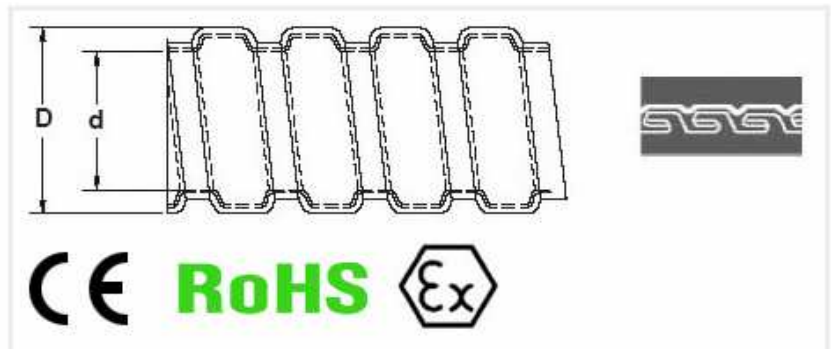

P/N	Specification		OD and tolerance (mm)	bending (mm)	Max axial direction tensile (Kg)	package unit (m)
	Metric	British system				
PDMMC06X	Φ6	3/16"	9.00 ± 0.25	40	335	200
PDMMC08X	Φ8	5/16"	11.8 ± 0.30	45	470	200
PDMMC10X	Φ10	1/4"	14.5 ± 0.30	55	590	100
PDMMC12X	Φ12	-	16.5 ± 0.35	60	710	100
PDMMC13X	Φ13	3/8"	17.5 ± 0.35	65	765	100
PDMMC15X	Φ15	-	20.2 ± 0.35	80	885	100
PDMMC16X	Φ16	1/2"	21.2 ± 0.35	85	940	100
PDMMC19X	Φ19	-	24.5 ± 0.40	95	1120	50
PDMMC20X	Φ20	3/4"	25.5 ± 0.40	100	1180	50
PDMMC25X	Φ25	1"	31.7 ± 0.45	120	1450	50
PDMMC32X	Φ32	1 1/4"	39.6 ± 0.50	150	1885	25

***P/N (x) for Black Color use B, Grey Color use G