




### Staright Fittings For PVC Covered , Liquid Tight Conduit



<b>Thread Specification:</b>	BS, Metric, PG.
<b>Material:</b>	A, C and F part made of intensified zinc alloy, D is made of steel plate.
<b>Color:</b>	Silver white.
<b>Protection grade:</b>	IP65
<b>Working temperature:</b>	-40°C-- +100°C, 120°C in short time.
<b>Characteristics</b>	<ol style="list-style-type: none"> <li>1. It will be appear 45° angle after connected with the box or conduit. Designed strictly accord to the conduit lock, equipped easily, powerful tensile resistance</li> <li>2. Change the thread specification accord to your special need.</li> </ol>

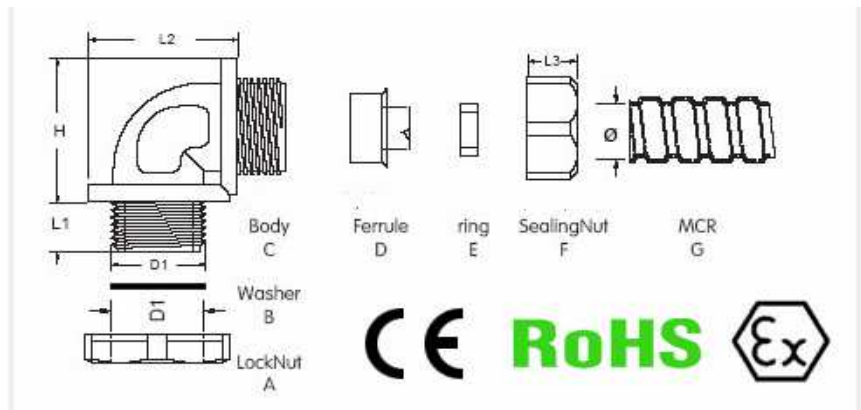

P/N	flexible tubing to be equipped with		thread standard	OD of thread	thread length	Junction length	package
	Metric	British system	G	D1	L1	>L2	/
PFMM12/C90	φ12(13)	3/8"	G3/8"	16.5	8	18	100
PFMM15/C90	φ15 (16)	1/2"	G1/2"	21.3	11	23	100
PFMM20/C90	φ20	3/4"	G3/4"	26.6	14	22	50
PFMM25/C90	φ25	1"	G1"	33.4	15	28	50
PFMM32/C90	φ32	1-1/4"	G1-1/4"	42.1	15	30	25